


ASC

Now you can see
+20° Upward by Wiper Dome

Beveled Dome A-ODW7G Series Wiper Dome®

Wiper Only Type
A-ODW7GW Series

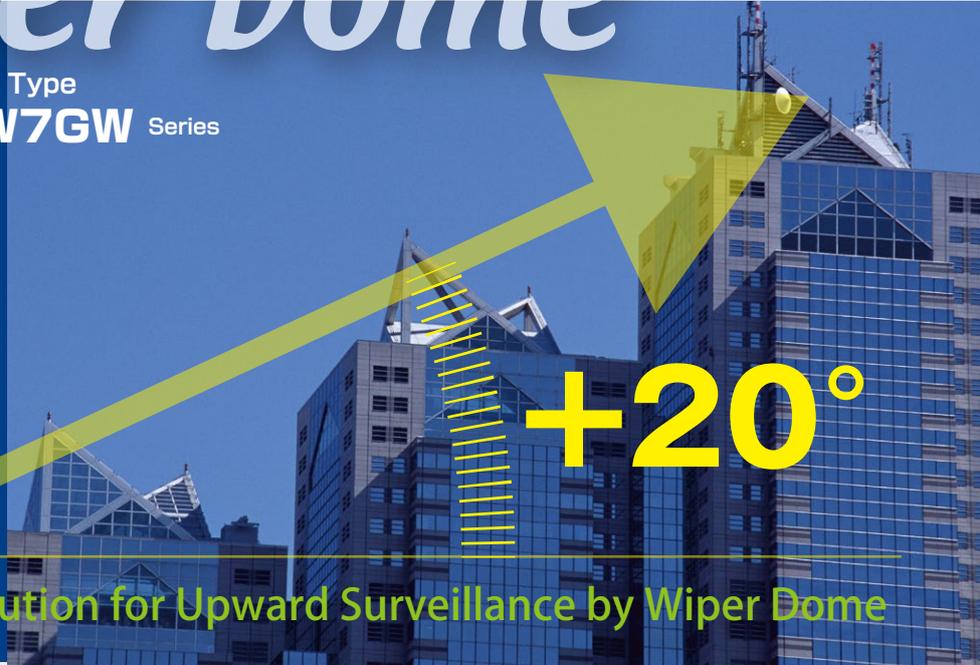

Solution for Upward Surveillance by Wiper Dome



Wiper & Washer Type
A-ODW7GWW Series

Features: 4K/Full HD Professional Camera Compatible
Example) Sony SNC-WR630, SRG-360SHE, Panasonic AW-UE70K, JVC KY-PZ100B

Optional Items


- 1) Camera Cooling Heat Sink + Blower Unit
- 2) Anti-Strong Wind Bracket
- 3) 2 Alarm Out PoE Power Thru splitter Unit
* For the cameras which have no Alarm Out(Controlling Wiper/Washer)
- 4) Front Direction Adjustable Bracket
* Pan Right & Left 45°each adjustable

Compatible with A-ODW7/7S Series

Example of Upward Visible Area (Lens Wide Max: Horizontal Viewing Angle 64° Vertical Viewing Angle 35°)

Center of Wiper Shaft
(Front Center)

* Note: You can Move Center of Wiper Shaft Right & Left 60° each

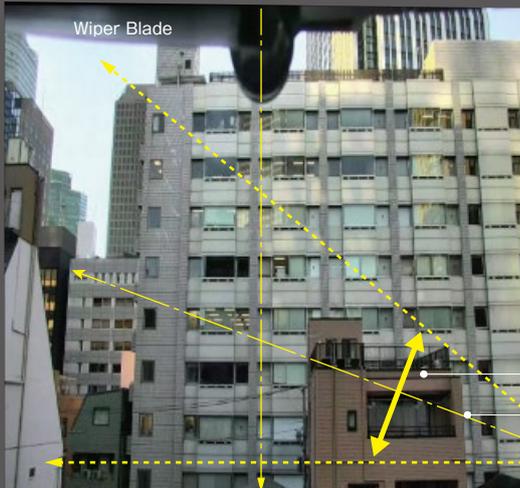

Vertical Viewing Angle 35°
Tilt Up +20° Center of Lens
Tilt 0° Center of Lens

Pan Left 20° Viewing Upper Housing (Tilt UP+20°)
Note : In case of Tilt Down - 8° ,
No Upper Housing Visible within Tilt 300° Area.

Beveled Dome A-ODW7G Series

Wiper Dome®

Note 1 : After operation, direct camera lens downward to protect image sensor of camera from sunlight.

Note 2 : Do not see Sun directly to avoid damage of eyes.

* We are free from any responsibilities for an accident or damage of camera unit or person's eyes due to misuse of our housing unit.

How to select Model

Wiper Only Type

① ② ③ ④ ⑤ ⑥

A-ODW7GW C 1 S A

① Capsule

C = Clear
T = Tinted

② Blower & Heater

2 = 24VAC 25W
2(50W) = 24VAC 50W for Cold Area
12 = 12VDC 25W
12(50W) = 12VDC 50W for Cold Area
12(POE+M) = 12VDC POE Type (60W Midspan included)

③ With or Without Sunshield

Blank: No Sunshield
S = With Sunshield

④ Type of Mounting Bracket

Blank: Wall Mount
A-E: Bracket Type

⑤ Microphone

Blank = Without Mic
M = With Mic

⑥ Color of Housing

Blank: Standard Silver
(OW) = Off-white
(DB) = Dark Brown

Note: Our Standard Anti-corrosion Paint(TC) was done for Mounting Bracket.

Wiper & Washer Type

① ② ⑤ ⑥

A-ODW7GWW C S

① Capsule

C = Clear
T = Tinted

② Blower & Heater

2 = 24VAC 25W
2(50W) = 24VAC 50W for Cold Area
12 = 12VDC 25W
12(50W) = 12VDC 50W for Cold Area
12(POE+M) = 12VDC POE Type (60W Midspan included)

⑤ Microphone

Blank = Without Mic
M = With Mic

⑥ Color of Housing

Blank: Standard Silver
(OW) = Off-white
(DB) = Dark Brown

Note 1) Washer Reservoir Box(Made of SUS304) is included.

Note 2) Only Wall Mount Bracket(A-WB10) is available.

Note 3) Sunshield is included.

Note 4) Our Standard Anti-corrosion paint was done for both Wall Mount Bracket and Washer Reservoir Box.

Note 5) Color of Washer Reservoir Box is the same as Wall Mount Bracket.

(For different color for necessary, you need instruction in advance.)


Note 6) For Pole/Corner Mount, you need 2pcs of optional Wall/Corner Mount.

Optional Items for Beveled Dome A-ODW7G Series

Camera Cooling Heat Sink + Blower Unit

You can install 1-4 pcs of 12VDC 0.5W Blower Unit subject to the output of power supply unit.

A-BRK20HTS

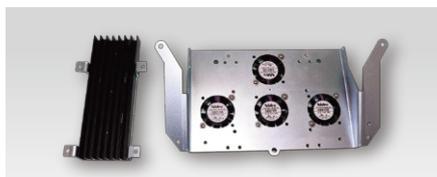

Anti-Strong Wind Bracket

2 pcs of Optional Pole Mount Adapter A-BK3/3S are required for Pole Mount.

A-BRK20



2 Alarm Out PoE Power Through Splitter Unit

* For the cameras which have no Alarm Out. (Controlling Wiper/Washer)

PoE-ZRS60ATGW



Front Direction Adjustable Bracket

* Pan Right & Left 45° each adjustable.

A-PAN90



Note : Regarding Optional Items of Wiper Dome, see the catalog of Wiper Dome.

※ Specifications are subject to change without prior notice.

Manufactured by:

ASC

ASC Corporation

3-16-9, Toranomon, Minato-ku, Tokyo 105-0001, Japan
TEL +81-3-5473-7627 FAX +81-3-5473-7628

(Wholesale for U.S.A. Market only)

ASC-USA, INC.

5975 Shiloh Road, Suite 103 Alpharetta, GA 30005, U.S.A.
TEL 770-888-4674 TEL 1-888-988-4674 FAX 770-888-4675

<http://www.kk-asc.com>