

Specifications						
Model number	A-ODW7GH**S	A-ODW7GH**SA	A-ODW77GH**SB	A-ODW7GH**SC	A-ODW7GH**SD	A-ODW7GH**SE
Mounting Bracket	Wall Mount W type	Wall Mount A type	Type-B Ceiling Mount	Type-C Ceiling Mount	Type-D Ceiling Mount	Type-E Ceiling Mount
Operating Environment	Outdoor					
Operating Temperature	-50°C(-58°F)~+45°C(113°F) (AC24V/DC12V 50W) -20°C(-4°F)~+45°C(113°F) (POE 60W)					
IP Rate	IP66					
Max Wind Load	Products will not be destroyed by maximum 50m/sec (167 ft/sec) wind load. *Safety of 50m/sec (167 ft/sec) was confirmed by actual wind load test. *Safety of 60m/sec (200 ft/sec) was confirmed by our factory test data.					
Housing	Material = PC/ABS UL94 V-0 Standard Color : Silver (Housing Top = Aluminum) Optional Color : (OW) = Off-White (RAL9002 Similar) Optional Color : (OB) = Dark Brown (Munsell 5YR2/1.5 Similar) *Vandal Resistant M4 Screws x 7 pcs. & Tool Set Model A-VSM4TL is optional.					
Capsule	Material = PC UL 94 V-0 Light Loss: [C] = Clear = Almost zero [T] = Tinted = Approx. 60%					
Mounting Bracket	Material: Aluminum=Standard Type-W & A Wall Mount, Type-C Ceiling Mount Steel = Type-B, D, E Ceiling Mount Color: Standard Type-W & A Wall Mount= Black(When Housing Color is Silver) Type-B Ceiling Mount = Black/OW/DB based on Housing Color. Type-C Ceiling Mount = Sky-white Type-D & E Ceiling Mount = Off-white(RAL9002 Similar) Paint Method: Powder Coat Finish					
Weight	Approx.5.5kg(12.1 lbs) Approx.5.3kg(11.7 lbs) Approx.4.4kg(9.7 lbs)					
Recommended Screw	3/8" or M8~M10 Stainless Screws x 4 (Not included in product)					
Heater(Optional)	2 = 24VAC 25W 12 = 12VDC 25W 2(50) = 24VAC 50W for Extreme Cold Area 12(50) = 12VDC 50W for Extreme Cold Area 12(POE+M) = 12VDC Input 25W Standard(Optional 6W/12W) Auto by Themostat 4.4°C(40P)=ON 16°C(60P)=OFF					
Blower(Optional)	12VDC 1W Manufacturer: Nidec Servo Corporation Model EUDC12D8 DC12V 0.04A 0.5W x 2 units are installed for both 24VAC/12VDC blower type. Auto by thermostat 35°C (95°F) = ON 27°C (80°F) = OFF					
Wiper Motor	12VDC 3.5W					
Fuse	125V 5A(Size 5.2 x 20mm) for 24VAC Blower & Heater(Extra 1 pc. is provided.) No fuse for 12VDC Blower & Heater.					
Microphone(Optional)	M = Condenser Microphone for MIC IN without Amplifier (3.5mm Monaural Mini Plug) *1, *2, *3					
Standard & Complilance	RoHS, UL(File# E313815), CE, EAC, RCM	<u> </u>			


- *1 You may be annoyed by the noise of blower when it is on.
- *2 You need to consult with us in advance when you need optional Microphone with Amplifier Model A-AUD1 for LINE IN.
- *3 We are unable to take any responsibilities for the troubles such as an intrusion of privacy caused by the use of Microphone.
- User's discretion is advised and User is required to abide by the local law. *4 Due to size and specification of camera splitter may not be installed in housing.
- *5 As regards the specification of both splitter and Midspan, you are requested to obtain our confirmation in advance before ordering.

 *6 "Optional" Two-Coat system comprises 1 coat = powder coating primer (Epoxy base) and Tow coat = UV resistant (Polyester base) powder coating based on our standard.
- *7 Before Two Coat (-TC), Cation Electrodeposition will be added. (For details, click our website top "Anti-Corrosion Paint")




Unit:[inch]

A-ODW7GH S (Standard Wall Mount W Type)

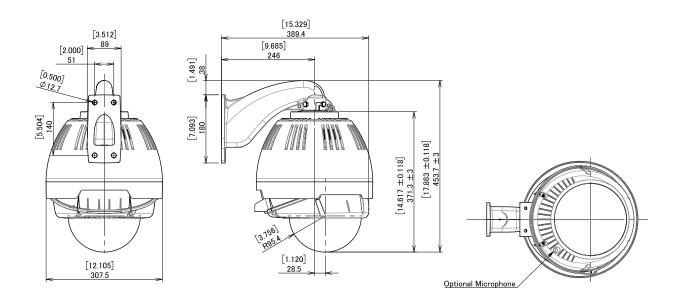


A-ODW7GH S (Type A Wall Mount)

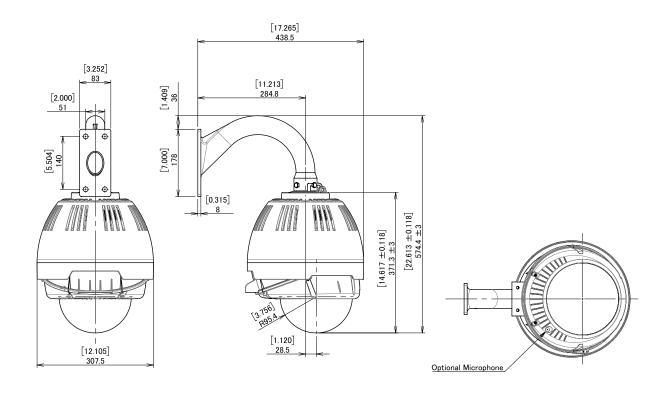




Unit:[inch] mm

A-ODW7GH S (Type B Ceiling Mount)

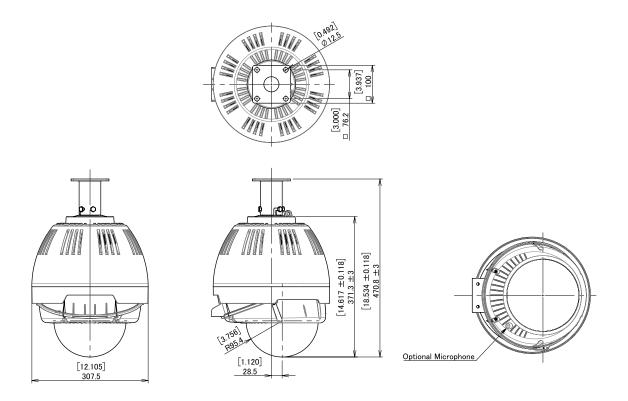


A-ODW7GH S (Type C Ceiling Mount)

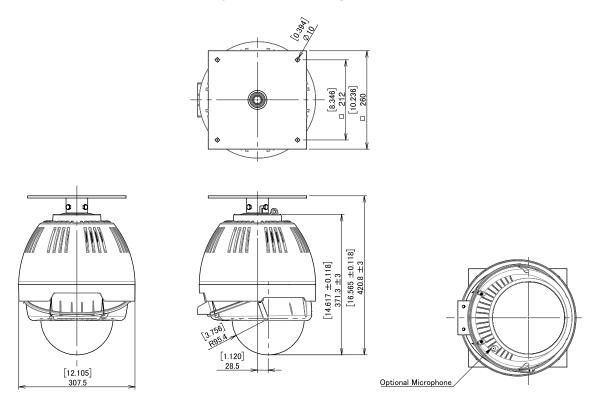



A-ODW7GH S (Type D Ceiling Mount)

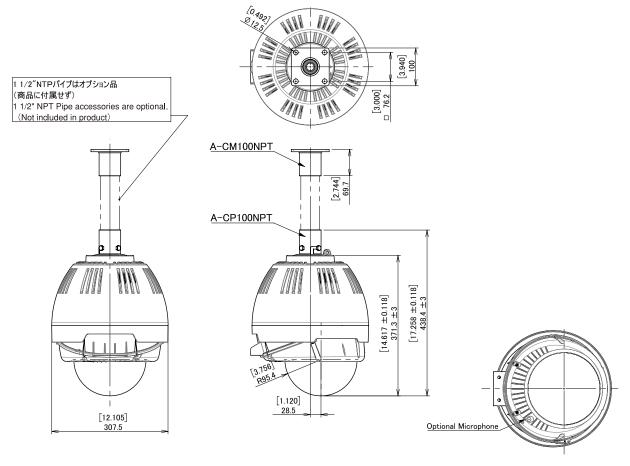

A-ODW7GH S (Type E Ceiling Mount)

