



# Outdoor Dome Housing

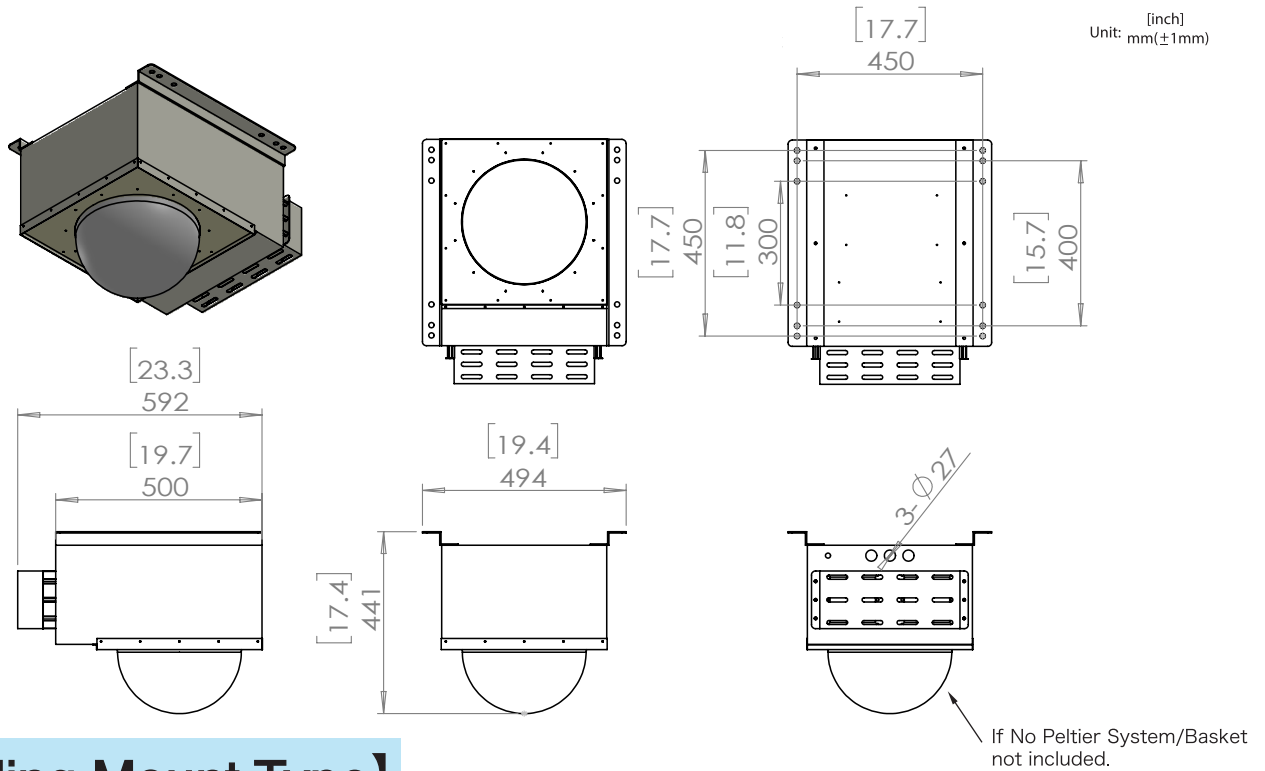

## 【Ceiling Mount Type】

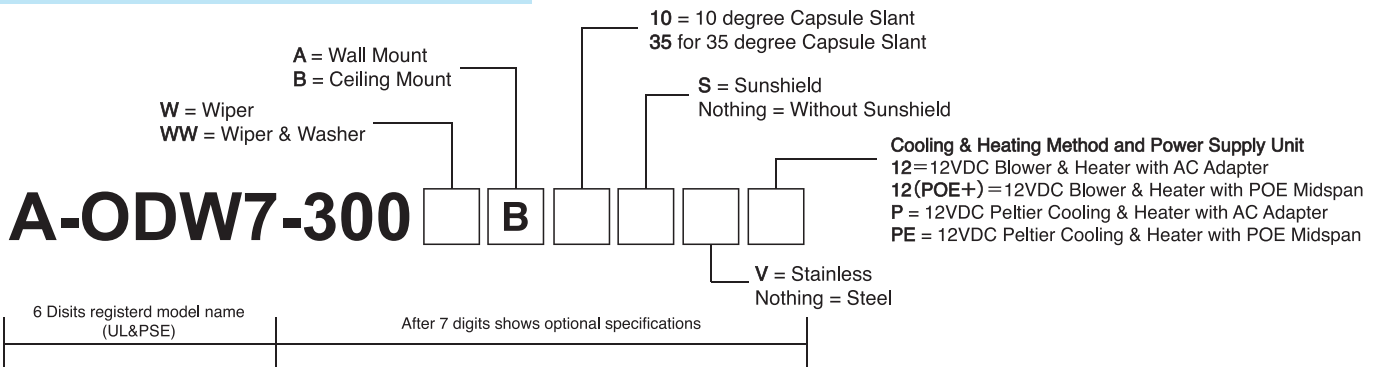

Specification	
Operating Environment	Outdoor
Operating Temperature	-20°C ~ 50°C *Additional Cooling/Heating Device will be needed for Extreme Hot/Cold Area (Consult with us in advance)
IP Rate	IP66
Max Wind Load	66m/sec
Materials	Housing: Stainless(SUS304) or Steel    Capsule: Clear Acrylic or PC (Light Loss = Almost Zero)
Color	Offwhite (RAL9002 similar) Powder Coat Finish
Weight	Stainless = Approx. 20kg    Steel = Approx. 18kg    *Add 1.5kg for Peltier Active Cooling Type
Recommended Screw	3/8" or M10 Stainless Screws x 4 (Not included in product)
Power Consumption of Heater	Cooling (Peltier/Blower)    35°C(ON)    27°C(OFF) Heater    4.4°C(ON)    16°C(OFF)
Power Supply for Housing (Cool/Heat/Wiper/Washer)	AC Adapter Method = 12VDC 80W Toki Trading Model SPU105 POE Method = 90W Midspan    Microchip Model PD-9601
Compliance & Standard	RoHS, PSE, CE, RCM, UL (File# E313815)

- \* Due to size and Specifications of camera, it may not be installed in Housing.
- \* Specifications are subject to change without prior notice for improvement of products.