


Outdoor Dome Housing

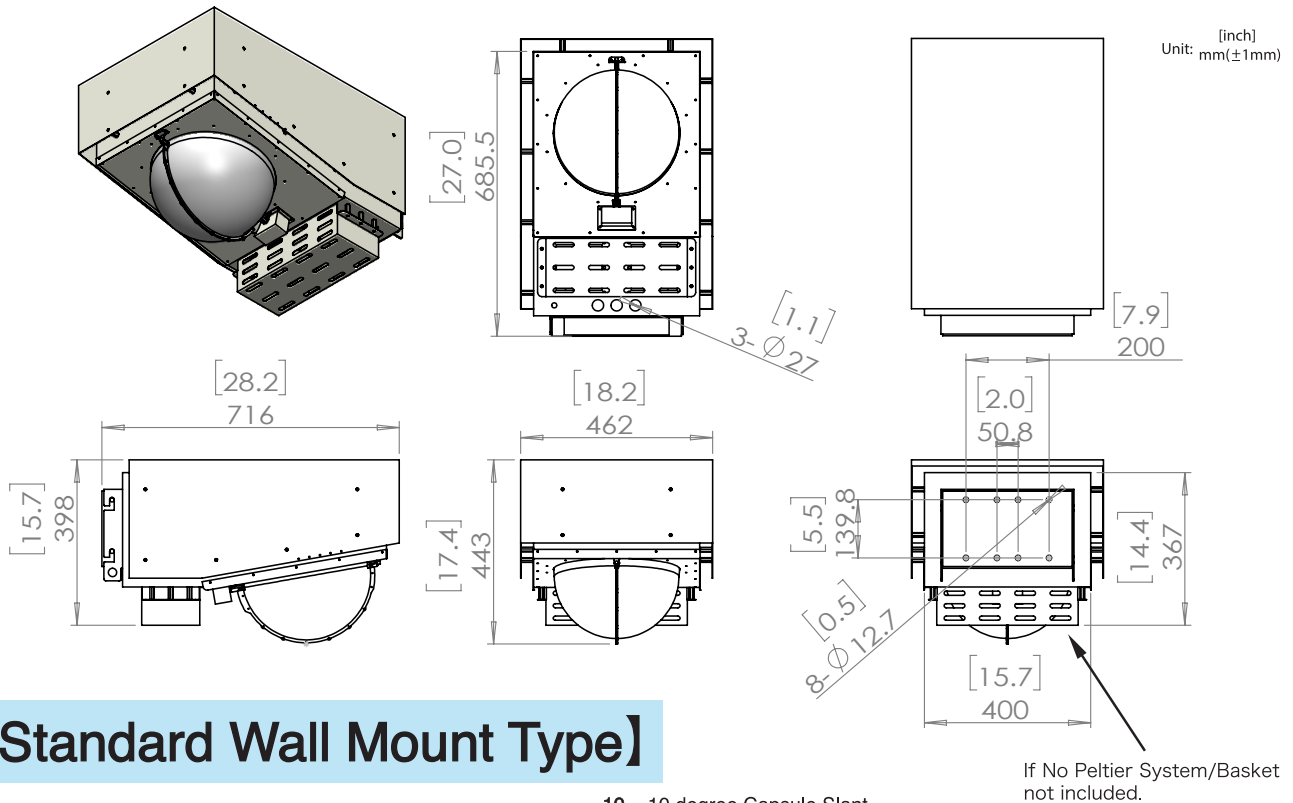

【Standard Wall Mount Type】

A-ODW7-300 **W** **A** **10** **S**

W = Wiper
WW = Wiper & Washer

A = Wall Mount
B = Ceiling Mount

10 = 10 degree Capsule Slant
35 for 35 degree Capsule Slant

S = Sunshield
Nothing = Without Sunshield

V = Stainless
Nothing = Steel

Cooling & Heating Method and Power Supply Unit
12=12VDC Blower & Heater with AC Adapter
12(POE+)=12VDC Blower & Heater with POE Midspan
P = 12VDC Peltier Cooling & Heater with AC Adapter
PE = 12VDC Peltier Cooling & Heater with POE Midspan

6 Disits registered model name (UL&PSE)

After 7 digits shows optional specifications

| Specification | |
|---|--|
| Operating Environment | Outdoor |
| Operating Temperature | -20°C ~ 50°C *Additional Cooling/Heating Device will be needed for Extreme Hot/Cold Area (Consult with us in advance) |
| IP Rate | IP66 |
| Max Wind Load | 66m/sec |
| Materials | Housing: Stainless(SUS304) or Steel Capsule: Clear Acrylic or PC (Light Loss = Almost Zero) |
| Color | Offwhite (RAL9002 similar) Powder Coat Finish |
| Weight | Stainless = Approx.28kg Steel = Approx.25.5kg *Add 1.5kg for Peltier Active Cooling Type |
| Recomended Screw | 3/8" or M10 Stainless Screws x 4 (Not included in product) |
| Power Consumption of Heater | Cooling (Peltier/Blower) 35°C(ON) 27°C(OFF) Heater 4.4°C(ON) 16°C(OFF) |
| Power Supply for Housing (Cool/Heat/Wiper/Washer) | ACAdapter Method=12VDC 80W Toki Trading Model SPU105 POE Method=90W Midspan Microchip Model PD-9601 |
| Compliance & Standard | RoHs, PSE, CE, RCM, UL(File# E313815) |

- * Due to size and Specifications of camera, it may not be installed in Housing.
- * Specifications are subject to change without prior notice for improvement of products.