



Outdoor Dome Housing

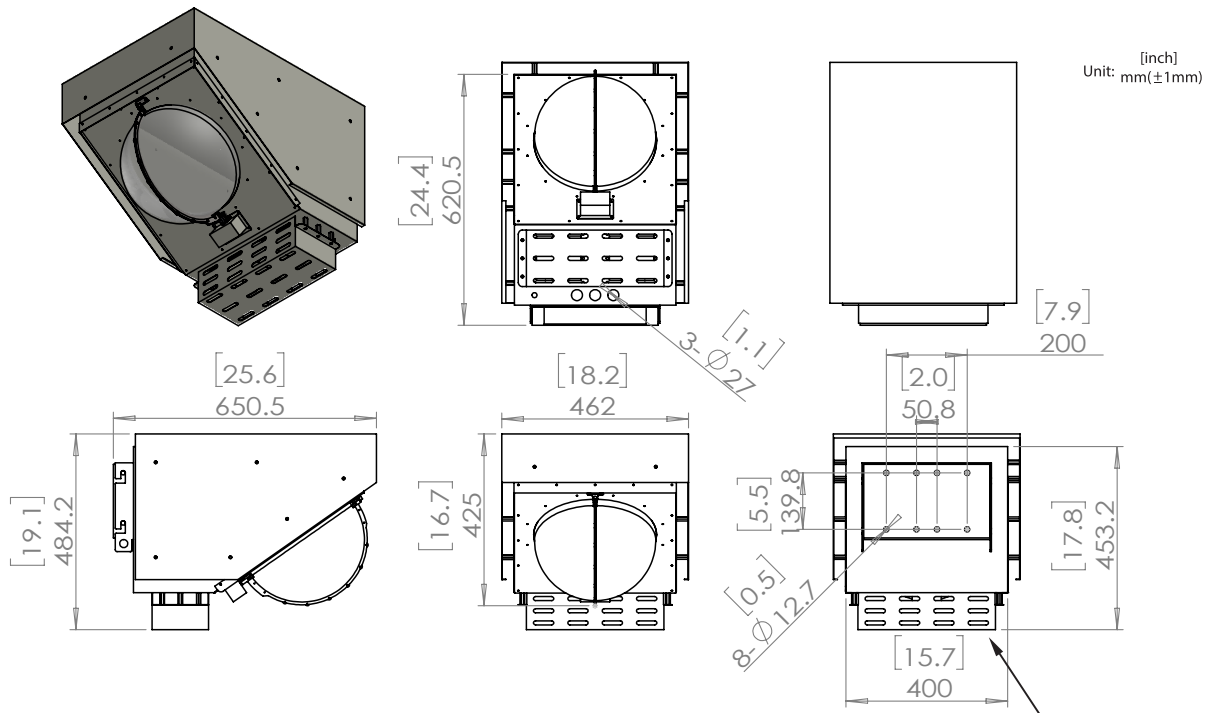

【Capsule Slant 35 deg Wall Mount Type】

If No Peltier System/Basket not included.

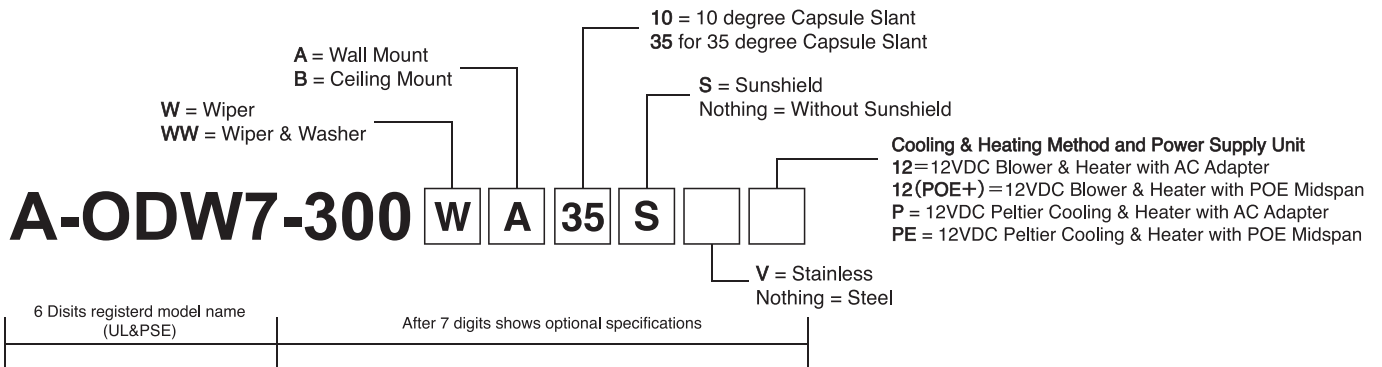

Specification	
Operating Environment	Outdoor
Operating Temperature	-20°C ~ 50°C *Additional Cooling/Heating Device will be needed for Extreme Hot/Cold Area (Consult with us in advance)
IP Rate	IP66
Max Wind Load	66m/sec
Materials	Housing : Stainless(SUS304) or Steel Capsule : Clear Acrylic or PC (Light Loss = Almost Zero)
Color	Offwhite (RAL9002 similar) Powder Coat Finish
Weight	Stainless = Approx.30kg Steel = Approx.26.8kg *Add 1.5kg for Peltier Active Cooling Type
Recomended Screw	3/8" or M10 Stainless Screws x 4 (Not included in product)
Power Consumption of Heater	Cooling (Peltier/Blower) 35°C(ON) 27°C(OFF) Heater 4.4°C(ON) 16°C(OFF)
Power Supply for Housing (Cool/Heat/Wiper/Washer)	ACAdapter Method=12VDC 80W Toki Trading Model SPU105 POE Method=90W Midspan Microchip Model PD-9601
Compliance & Standard	RoHs, PSE, CE, RCM, UL(File# E313815)

- * Due to size and Specifications of camera, it may not be installed in Housing.
- * Specifications are subject to change without prior notice for improvement of products.